



Safety Harness

MODEL **UB-102**

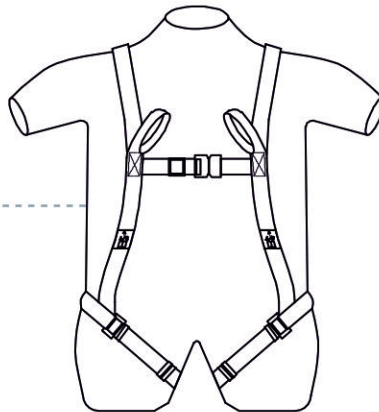

FRONT

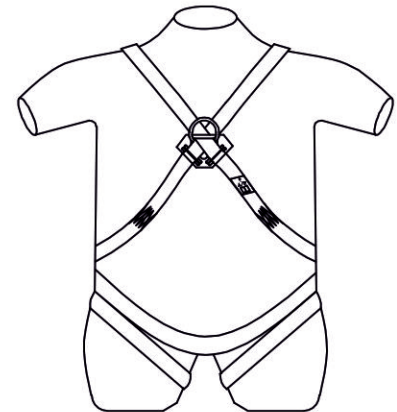

BACK



DESIGN	<ul style="list-style-type: none"> ▪ One dorsal attachment D-ring for fall arrest. ▪ Two front textile chest attachment loop for fall arrest. ▪ Adjustable chest strap. ▪ Adjustable leg straps. ▪ Ideally positioned sit strap for extended comfort 						
TYPE	Class L & A						
COLOUR	Blue & Green						
WEBBING	<table style="width: 100%; border: none;"> <tr> <td style="padding-right: 10px;">Material</td> <td>▶ Polyester</td> </tr> <tr> <td>Width</td> <td>▶ 44± 1mm</td> </tr> <tr> <td>Breaking strength</td> <td>▶ 20 kN (Min).</td> </tr> </table>	Material	▶ Polyester	Width	▶ 44± 1mm	Breaking strength	▶ 20 kN (Min).
Material	▶ Polyester						
Width	▶ 44± 1mm						
Breaking strength	▶ 20 kN (Min).						
STITCHING THREAD	<table style="width: 100%; border: none;"> <tr> <td style="padding-right: 10px;">Material</td> <td>▶ High-tenacity polyamide.</td> </tr> <tr> <td>Colour</td> <td>▶ white</td> </tr> </table>	Material	▶ High-tenacity polyamide.	Colour	▶ white		
Material	▶ High-tenacity polyamide.						
Colour	▶ white						
METAL COMPONENTS	<table style="width: 100%; border: none;"> <tr> <td style="padding-right: 10px;">Material</td> <td>▶ High strength steel.</td> </tr> <tr> <td>Plating</td> <td>▶ Zinc Plated (Thickness- 8 micron)</td> </tr> <tr> <td>Finish</td> <td>▶ Shot Blasted</td> </tr> </table>	Material	▶ High strength steel.	Plating	▶ Zinc Plated (Thickness- 8 micron)	Finish	▶ Shot Blasted
Material	▶ High strength steel.						
Plating	▶ Zinc Plated (Thickness- 8 micron)						
Finish	▶ Shot Blasted						
VITAL TEST COMPLIANCE	<table style="width: 100%; border: none;"> <tr> <td style="padding-right: 10px;">Static Strength</td> <td>▶ 15 kN or 1,530 kgf for 3 Minutes at each attachment element.</td> </tr> <tr> <td>Dynamic strength</td> <td>▶ Free fall from 1.8 meters height donned to a test dummy weighing 100 kg at each attachment element.</td> </tr> </table>	Static Strength	▶ 15 kN or 1,530 kgf for 3 Minutes at each attachment element.	Dynamic strength	▶ Free fall from 1.8 meters height donned to a test dummy weighing 100 kg at each attachment element.		
Static Strength	▶ 15 kN or 1,530 kgf for 3 Minutes at each attachment element.						
Dynamic strength	▶ Free fall from 1.8 meters height donned to a test dummy weighing 100 kg at each attachment element.						
WEIGHT	0.800 kg						
STANDARD	CE EN 361						
MARKING	Logo ♦ Manufacturer's Name ♦ Address Model No. ♦ Type ♦ Year Of Mfg. ♦ Approval						

Udyogi Plastics Pvt. Ltd.

294, B. B. Ganguly Street, 2nd Floor, Kolkata - 700 012
 Tel. : +91 33 2225 1470/71/72 ▶ Fax : +91 33 2225 1486
 E-mail : corp@udyogi.net ▶ Website : www.udyogisafety .com

▶ mumbai@udyogi.net ▶ delhi@udyogi.net
 ▶ chennai@udyogi.net ▶ orissa@udyogi.net
 ▶ abd@udyogi.net ▶ noida@udyogi.net