

Product data sheet

Specifications



power supply module Modicon Quantum - 120..230 V AC - standalone

140CPS11100

! To be discontinued on: 31 December 2022

! To be end-of-service on: 31 December 2030

! To be discontinued

Main

Range of product	Modicon Quantum automation platform
Product or component type	Power supply module
Power supply type	Standalone

Complementary

Input voltage	120...230 V (100...276 V) AC 47...63 Hz
Input current	200 mA at 230 V 400 mA at 115 V
Inrush current	10 A 230 V 20 A 115 V
Rated power in VA	50 VA
Associated fuse rating	1.5 A, slow-blow
Harmonic distortion	<= 10 % of fundamental rms value
Output voltage	5.1 V DC
Power supply output current	3 A standalone
Output overvoltage protection	Internal
Output overload protection	Internal
Power dissipation	2 + (3 x I _{out}) where I _{out} is in A
Local signalling	1 LED (green) for power (PWR OK)
Marking	CE
Module format	Standard
Net weight	0.65 kg

Environment

Standards	UL 508 CSA C22.2 No 142
Product certifications	cUL FM Class 1 Division 2
Resistance to electrostatic discharge	4 kV contact conforming to IEC 801-2 8 kV on air conforming to IEC 801-2
Resistance to electromagnetic fields	10 V/m 80...2000 MHz conforming to IEC 801-3

Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-40...85 °C
Relative humidity	95 % without condensation
Operating altitude	<= 5000 m

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	665.0 g
Package 1 Height	16.3 cm
Package 1 width	4.5 cm
Package 1 Length	31.2 cm
Unit Type of Package 2	S03
Number of Units in Package 2	7
Package 2 Weight	4.543 kg
Package 2 Height	30 cm
Package 2 width	30 cm
Package 2 Length	40 cm

Offer Sustainability


EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Contractual warranty

Warranty	18 months
----------	-----------

Racks for Modules Mounting


Dimensions of Modules and Racks

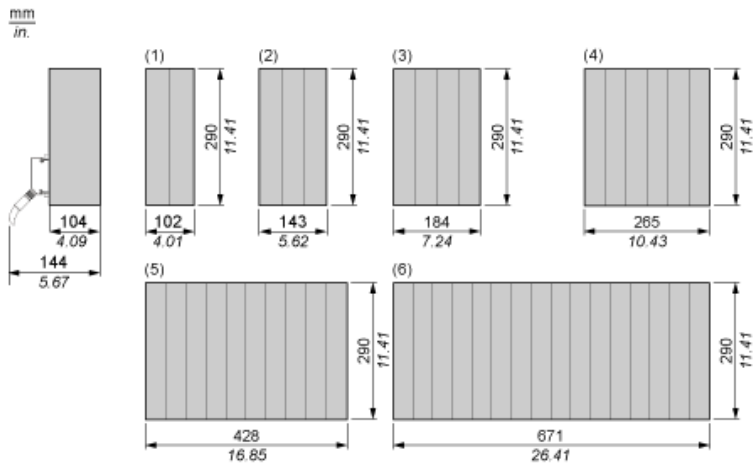

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

115/230 Vac, 3 A Power Supply Module


Wiring Diagram

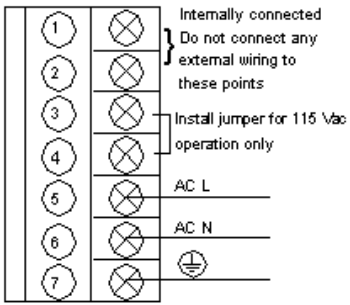

Recommended replacement(s)

140CPS11100 is replaced by:

1x



power supply module X80 - 100..240 V AC - 36 W
BMXCPS3500